


LAOKEN Air Disinfecting Equipment

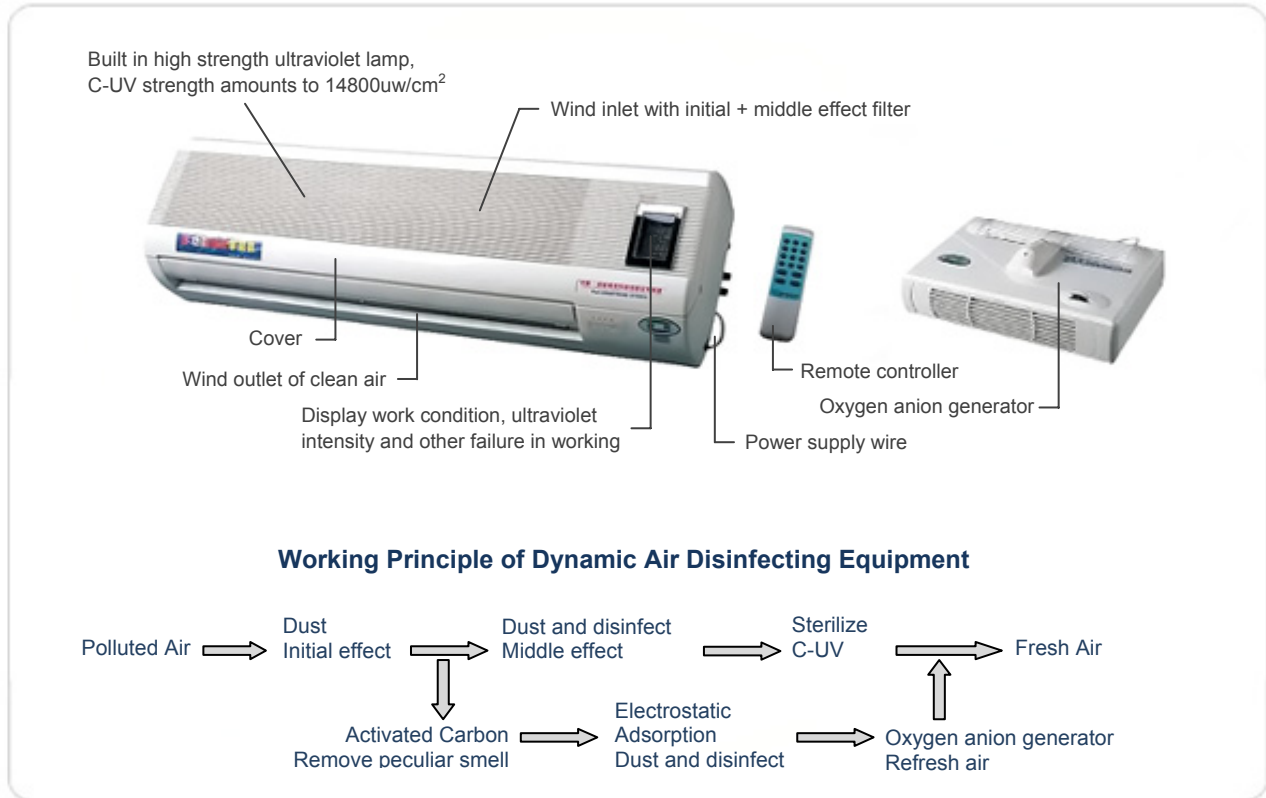

Air Disinfecting Equipment

Items		Specifications	KDSJ-Y120					KDSJ-B80		
Volume of application (m ³)	Sanitary place		60	80	100	120	150	60	80	100
	General place		100	120	200	250	250	100	120	150
Disinfecting blowing rate in circles (m ³ /h)		≥ 480	≥ 640	≥ 800	≥ 960	≥ 1200	≥ 480	≥ 640	≥ 800	
Built-in radiant intensity of ultraviolet (uw/cm ²)		≥10000	≥10000	≥10000	≥10000	≥10000	≥10000	≥10000	≥10000	
Built-out ultraviolet leakage (uw/cm ²)		≤ 1	≤ 1	≤ 1	≤ 1	≤ 1	≤ 1	≤ 1	≤ 1	
The ozone quantity in air while disinfecting (mg/m ³)		≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	
Input power (W)		≤ 190	≤ 200	≤ 220	≤ 250	≤ 380	≤ 120	≤ 150	≤ 175	
Total quantity of germs (cfu/m ³)		≤ 200	≤ 200	≤ 200	≤ 200	≤ 200	≤ 200	≤ 200	≤ 200	
Quantity of anion per cm ³		6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶	
Noise: ≤55 db (A)										
Safety and protection categories: I class B model equipment										
Power supply: ~220V±10% 50Hz										